

# Artificial Intelligence Applications in the Development of Autonomous Vehicles: A Survey

Yifang Ma, Zhenyu Wang, Hong Yang, and Lin Yang, *Member, IEEE*

**Abstract**—The advancement of artificial intelligence (AI) has truly stimulated the development and deployment of autonomous vehicles (AVs) in the transportation industry. Fueled by big data from various sensing devices and advanced computing resources, AI has become an essential component of AVs for perceiving the surrounding environment and making appropriate decision in motion. To achieve goal of full automation (i.e., self-driving), it is important to know how AI works in AV systems. Existing research have made great efforts in investigating different aspects of applying AI in AV development. However, few studies have offered the research community a thorough examination of current practices in implementing AI in AVs. Thus, this paper aims to shorten the gap by providing a comprehensive survey of key studies in this research avenue. Specifically, it intends to analyze their use of AIs in supporting the primary applications in AVs: 1) perception; 2) localization and mapping; and 3) decision making. It investigates the current practices to understand how AI can be used and what are the challenges and issues associated with their implementation. Based on the exploration of current practices and technology advances, this paper further provides insights into potential opportunities regarding the use of AI in conjunction with other emerging technologies: 1) high definition maps, big data, and high performance computing; 2) augmented reality (AR)/virtual reality (VR) enhanced simulation platform; and 3) 5G communication for connected AVs. This paper is expected to offer a quick reference for researchers interested in understanding the use of AI in AV research.

**Index Terms**—Artificial intelligence (AI), autonomous vehicles (AVs), deep learning (DL), motion planning, perception, self-driving.

## I. INTRODUCTION

THE rapid development of autonomous vehicles (AVs) has drawn great attention worldwide in recent years. The

Manuscript received October 27, 2019; revised December 20, 2019; accepted January 14, 2020. This work was partially supported by the Fundamental Research Funds for the Central Universities (2662019QD002). Recommended by Associate Editor MengChu Zhou. (*Corresponding author: Hong Yang.*)

Citation: Y. F. Ma, Z. Y. Wang, H. Yang, and L. Yang, “Artificial intelligence applications in the development of autonomous vehicles: a survey,” *IEEE/CAA J. Autom. Sinica*, vol. 7, no. 2, pp. 315–329, Mar. 2020.

Y. F. Ma is with the Department of Information Technology and Decision Sciences, Old Dominion University, Norfolk, VA 23529 USA (e-mail: yma004@odu.edu).

Z. Y. Wang and H. Yang are with the Department of Computational Modeling and Simulation Engineering, Old Dominion University, Norfolk, VA 23529 USA (e-mail: zwang002@odu.edu; hyang@odu.edu).

L. Yang is with the Department of Mechanical and Electrical Engineering, Huazhong Agricultural University, Wuhan 430070, China (e-mail: lin.yang@hzaui.edu.cn).

Color versions of one or more of the figures in this paper are available online at <http://ieeexplore.ieee.org>.

Digital Object Identifier 10.1109/JAS.2020.1003021

promising AVs for innovating modern transportation systems are anticipated to address many long-standing transportation challenges related to congestion, safety, parking, energy conservation, etc. Arguably, many AV technologies in laboratory tests, closed-track tests, and public road tests have witnessed considerable advancements in bringing AVs into real-world applications. Such advancements have been greatly benefited from significant investments and promotions by numerous stakeholders such as transportation agencies, information technology (IT) giants (e.g., Google, Baidu, etc.), transportation networking companies (e.g., Uber, DiDi, etc.), automobile manufacturers (e.g., Tesla, General Motors, Volvo, etc.), chip/semiconductor makers (e.g., Intel, Nvidia, Qualcomm, etc.), and so forth. Nonetheless, the concept of AVs or self-driving vehicles is not new. It is recent major strides in artificial intelligence (AI) together with innovative data collection and processing technologies that drive the research in AVs to unprecedented heights.

The prevailing wisdom of earlier (semi-)automated driving concept was highly related to advanced driver assistance systems (ADAS) that assist drivers in the driving process. These systems are more related to applications such as lane-departure warning, and blind spot alerting. They aim to automate, adapt, and improve some of the vehicle systems for enhanced safety by reducing errors associated with human drivers [1]. Since the drivers are still required to perform various driving tasks, these systems are considered as the lower levels (Levels 1 and 2) of automation according to the classification of the Society of Automotive Engineers (SAE) [2], [3]. With the reduction of human driver involvement, the vehicle systems will proceed to Level 3 (conditional automation), Level 4 (high automation), and ultimately Level 5 (full automation). At Level 5, a vehicle is expected to drive itself under all environment circumstances. This truly self-driving level requires that the vehicle must operate with the capabilities of “perceiving”, “thinking”, and “reasoning” like a human driver. The AI advancements in recent years led to natural cohesiveness between AI and AVs for meeting such requirements. In particular, the success of AI in many sophisticated applications such as the AlphaGo has significantly promoted research in leveraging AIs in AV development. Especially, the advent of deep learning (DL) has enabled many studies to tackle different challenging issues in AVs, for example, accurately recognizing and locating obstacles on roads, appropriate decision making (e.g.,

controlling steering wheel, acceleration/deceleration), etc.

Overall, it has been shown that various AI approaches can provide promising solutions for AVs in recognizing the environment and propelling the vehicle with appropriate decision making. A few studies have specifically reviewed the applications of AI in a specific component associated AV development, for example, perception [4], motion planning [5], decision making [6], and safety validation [3], [7], [8]. Nonetheless, there still lacks a comprehensive review of the state of the art of the progress and lessons learned from AI applications in supporting AVs, especially in latest years after AlphaGo defeating human go masters. A thorough investigation on the methodological evolution of AI approaches, issues and challenges, and future potential opportunities can timely facilitate practitioners and researchers in deploying, improving, and/or extending many of current achievements.

Therefore, this paper aims to provide a survey of contemporary practices on how AI approaches have been involved in AV-related research in recent years and ultimately to explore the challenging problems, and to identify promising future research directions. To fulfill such goals, this paper starts with the description of the framework for performing literature review, and further moves on to a critical descriptive analysis of existing studies. Then it summarizes current practices of using AI for AV development. This is followed by the synthesis of major challenges, issues, and needs regarding current AI approaches in AV applications. Based on the investigation, the paper further provides suggestions on potential opportunities and future research directions. Finally, the conclusion is presented.

## II. PREPARATION FOR LITERATURE REVIEW

In order to conduct a comprehensive review of existing research efforts we performed an initial exploratory search about the published work from the following critical sources: 1) Web of Science (WoS); 2) Scopus; 3) IEEE Xplore; and 4) Google Scholar (GS). The search engine keywords include the combination of the thematic words (“Autonomous vehicles”, “AVs”, OR “Self-driving”) AND (“Artificial intelligence”, “Machine learning”, “Deep learning”, “Reinforcement learning”, OR “Neural network”). In sequence, we defined the search criteria to filter and select the key papers for a comprehensive review. The key criteria included: keywords related to the research topic, work published in English, peer-reviewed papers published by March 2019, and access to full papers. Depending on the data sources, the keywords cover article titles, abstracts, metadata, etc. Next, five research questions (RQs) were developed:

- 1) RQ1: How are existing research papers structured?
- 2) RQ2: What are the main focuses of the papers?
- 3) RQ3: What are the AI approaches applied in the papers?
- 4) RQ4: What are the main issues and challenges to apply AI approaches?
- 5) RQ5: What are the future opportunities of AI approaches in conjunction with other emerging technologies?

As shown in Fig. 1, key relevant studies published by March 2019 were identified. An initial set of 71 technical

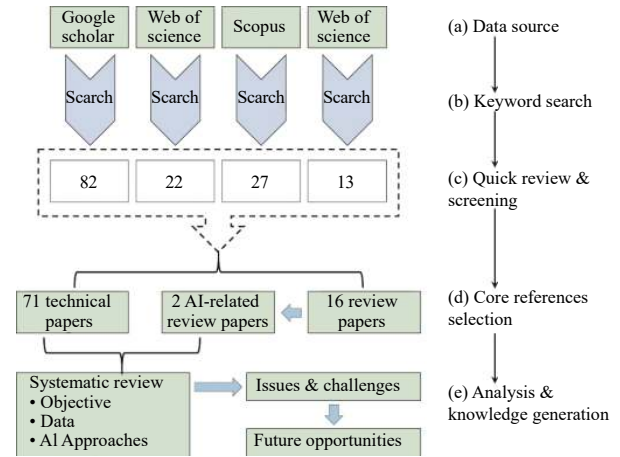


Fig. 1. Schematic of literature identification and research plan.

publications were identified, while 16 review papers pertinent to AVs were also sourced. Some publications were excluded based on the content analysis because they did not specifically deal with AI approaches. Then, two reviews focused on AI approaches in AV applications were identified. Specifically, Zitzewitz [9] investigated the application of neural networks (NN) in AVs but did not focus on other promising and influential AI approaches such as machine learning (ML) approaches (e.g., support vector machine (SVM)), DL approaches (e.g., long short-term memory (LSTM)), and reinforcement learning (RL) approaches (e.g., deep Q-network (DQN)). This review is not publicly available. Later, Shafaei *et al.* [7] specifically focused on safety issues raised by uncertainty in ML approaches: 1) incompleteness of training data; 2) distributional shift; 3) differences between training and operational environments; and 4) uncertainty of prediction). Despite existing efforts, there still lacks a comprehensive examination that can help well address the above research questions. Thus, we conducted a systematic review through identifying and discussing key components (objective, data, AI approaches), their issues and challenges, and future opportunities. The identified key publications are summarized and ordered by year in [Appendix](#).

## III. DESCRIPTIVE ANALYSIS

One possible method to infer over a particular state of the art is to conduct a descriptive analysis concerning the factual data, independent from the content of the items. Although limited, the information provided by the temporal, geographical, AI approaches, and application distributions can be of great importance when understanding the current state of the art. Fig. 2 shows the overall trend of studies on AI approaches in various AV applications.

As shown in Fig. 2, it is noticeable that publications regarding AI approaches in AV applications are on an incremental path, with 2018 being the peak year having 29 identified publications. Six publications were identified by the first quarter of 2019. It can be expected that additional publications will emerge in the rest periods of the year with the focus on AI approaches in AV applications.

To address geographical distribution, we sorted the

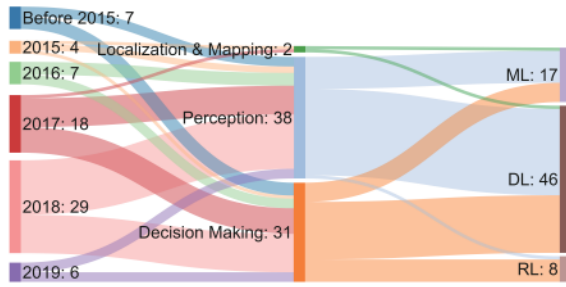


Fig. 2. Studies on AI approaches in the development of AVs (Note: data of 2019 include 1st quarter only).

identified publications by the nationality of corresponding authors. It was found that most publications involved corresponding authors from the United States (21 publications), followed by publications involving corresponding authors from China (18), European countries (16), and other countries (16). Many publications involve international collaboration.

Considering the AV application distribution, 38 papers mainly examined the applications of AI approaches in AV perception. This is followed by studies primarily concerning decision making (31), as well as localization and mapping (2). One reason is that perception of surrounding environments is the fundamental requirements for AV applications, and the mature and classical image recognition approaches (mainly ML and DL approaches) have been widely applied in many other areas. It should be noted that for those AV related research that do not focus on perception and localization and mapping, direct vehicle states such as location and speed are often acquired from simulation platforms rather than using image/3D cloud points in perception stage to serve as model inputs.

Finally, the key AI approaches used in existing studies have been examined. Seventeen technical publications used ML approaches. Forty-six technical papers introduced DL approaches including convolutional neural networks (CNN), LSTM, and deep belief neural networks (DBN) to applications such as vehicle perception, automatic parking, and direct decision making. Meanwhile, eight technical publications used RL approaches mainly to imitate human-like decision making.

#### IV. CURRENT PRACTICES OF USING AI FOR AVS

##### A. Training AI for Perception, Localization, and Mapping

The generalized structure of the AV driving system to recognize objects on roads includes two primary components: 1) a perception module that provides detection and tracking information about surroundings such as vehicles, pedestrians, and traffic signs based on inputs collected from various types of sensors such as radar, light detection and ranging (LIDAR) measurements, or cameras; and 2) localization and mapping module that refers to the relative states of AVs to others, for example, the distance of an AV to other vehicles, its position in the map, and relative speed.

###### 1) Perception Algorithms

In this paper, perception is considered as an AV's action

using sensors to continuously scan and monitor the environment, which is similar to human vision and other senses. Based on the needed output and goal, existing perception algorithms can be grouped into two categories: a) mediated perception that develops detailed maps of the AV's surroundings through analyzing distances to vehicles, pedestrians, trees, road markings, etc.; and b) direct perception that provides integrated scene understanding and decision making. Mediated perception uses AI approaches such as CNN to detect the single or multiple objects. One of the most classical perception tasks mastered by AI approaches is traffic sign recognition. The accuracy ratio of AI approaches such as deep neural network (DNN) has reached the value of 99.46% and outperformed human recognition in some tests [10]. Related topics like detecting lanes and traffic lights have also achieved accuracies of a similar level when applied CNN model structures. For example, Li *et al.* [11] proposed to combine road knowledge and fuzzy logic rules to detect roads for the vision navigation of AVs. Later, Li *et al.* [12] proposed adaptive randomized Hough transform algorithm (ARHT) to detect lanes and proved its validity compared with genetic algorithm based lane detection for AVs. Petrovskaya and Thrun [13] combined Rao-Blackwellized particle filter and Bayesian network to detect and track moving vehicles with Stanford's autonomous driving robot Junior. Fagnant and Kockelman [14] proposed a CNN approach that can detect more than 9 000 objects in real-time at 40–70 frames per second (fps) with a mean accuracy of nearly 80%, which makes it capable of detecting almost all things necessary for automotive tasks in a video or an onboard-camera. Such approaches use techniques such as edge detection and saliency analysis to extract high-level features to identify objects. Additional classification approaches such as support vector machines (SVM) have been introduced to further classify such CNN-learned features. For example, Zeng *et al.* [15] introduced extreme learning machine to classify deep perceptual features via CNN, and achieved a competitive recognition performance of 99.54% on the benchmark data of the German traffic signs.

Unlike single object perception, multi-task object perception imposes knowledge sharing while solving multiple correlated tasks simultaneously. It helps boost the performance of a part or even all the tasks. For example, Chu *et al.* [16] introduced the region-of-interest voting to implement the multi-task object detection based on CNN, and validated the proposed approach on KITTI and PASCAL2007 vehicle datasets. Meanwhile, Chen *et al.* [17] introduced the Cartesian product-based multi-task combination to simultaneously optimize object detection and object distance prediction to fully take advantage of the dependency among such tasks.

In addition, instead of detecting objects such as vehicles and traffic signs, semantic segmentation of roads with drivable surface plays an important role in AV perception. Semantic segmentation links each pixel in an image to a class label such as pedestrians, vehicles, and roads. It helps AVs to better understand the context in the environment. For example, John *et al.* [18] used a special CNN encoder-decoder architecture. After the input image was processed through the network, a pixel-wise classification was computed to determine the label



of each pixel. It reported a prediction accuracy of 88% for cars and 96% for roads.

As for the direct perception, AVs complete sections of the mapping-related computation (for example, determining AV's current angle on the road and the distance to surrounding vehicles and lane markings) but do not create a complete local map or any detailed trajectory plans. Thus, direct perception skips the majority of the localization and mapping stage and directly controls the output of the steering angle and vehicle speed. Despite the involvement of decision making, studies on direct perception are considered under the perception group as shown in Fig. 2. For example, Chen *et al.* [19] used TORCS image data as the input and developed DNN to determine an AV's steering angle and velocity. Furthermore, the same perception system was tested using videos and images from the KITTI database, showing that the system could recognize lane configurations and transitions in the real world. Similarly, Bojarski *et al.* [20], [21] proposed the PilotNet, which is a CNN framework consisting of one normalization layer, five convolutional layers, and three fully connected layers, to train AVs to steer on the road with camera images as the input and steering parameters as the output.

## 2) Localization and Mapping

Localization and mapping have evolved from stationary, indoor mapping for mobile robot applications, to outdoor, dynamic, high-speed localization and mapping for AVs. This process is also named as simultaneous location and mapping (SLAM).

Many prototype vehicles, such as the Google, Uber, and Navya Arma AVs, have used priori mapping methods. These methods consist of pre-driving specific roads and collecting detailed sensor data, such as 3D images and highly accurate GPS information. Large databases store the created detailed maps for a vehicle to drive autonomously on those specific roads. Local localization is performed by observing similarities between priori maps and the current sensor data, whereas obstacle detection is achieved through observing discrepancies between the a priori map and the current sensor data. For example, Alcantarilla *et al.* [22] fused data from GPS, inertial odometry, and cameras as the input of the SLAM to estimate vehicle trajectory and a sparse 3D scene reconstruction. Image pairs are aligned based on similarity and further used to detect potential street-view changes. In addition, given the assumption that objects recognized by AV's sensors should be on the ground plane, Vishnukumar *et al.* [23] estimated car distances with the camera and LIDAR signals from the KITTI dataset. A two-CNN system was used with one for close-range (2–25 m) and another for far-range (15–55m) object detection considering the low resolution of input images. Then, the outputs of the two CNNs were combined for estimating the final distance projection.

## B. Training AI for Decision Making

Given the learned information such as surroundings, vehicle states (velocity and steering angle), decision making related applications such as automatic parking, path planning, and car following have been investigated.

Automated parking is automated driving in a restricted scenario of parking with low speed maneuvering. Other than semi-automated parking using ultrasonic sensors or radars, automated parking using camera, radar, or LIDAR sensors have been investigated [24]. Potential applications including 3D point cloud-based vehicle/pedestrian detection, parking slot marking recognition, and free space identification are discussed. Meanwhile, Notomista and Botsch [25] proposed a two-stage random forest-based classifier to assist autonomous parking and validated the approach during the Audi Autonomous Driving Cup, a college-level contest.

Conventional path planning methods have been widely explored. These methods typically include artificial potential field, distance control algorithm, bumper event approach, wall-following, sliding mode control, dijkstra, stereo block matching, voronoi diagram, SLAM, vector field histogram, rapidly exploring random tree, curvature velocity, lane curvature, dynamic window, and tangent graph [26]. However, most of these approaches are time-consuming and relatively difficult to implement in real robot platforms. Thus, AI-based approaches such as NN, genetic algorithms (GA), simulated annealing (SA), and fuzzy logic [11] have been introduced and achieved relatively high performance. For example, Hardy and Campbell [27] introduced the obstacle trajectory clustering algorithm and simultaneously optimize multiple continuous contingency paths for AVs. Al-Hasan and Vachtsevanos [28] proposed an intelligent learning support machine to learn from previous path planning experiences for optimized plan planning decisions at high speeds in natural environments. Meanwhile, Chen *et al.* [29] combined fuzzy SVM and general regression neural network to support path planning in off-road environments. Sales and Correa [30] used NN to perceive surrounding environments and proposed the adaptive finite state machine for navigating AVs under urban road environments. Similarly, Akermi *et al.* [31] proposed a sliding mode control mode for path planning of AVs. The inner radial basis function neural network (RBFNN) and fuzzy logic system was found to be able to well deal with uncertainties and mismatched disturbance in simulation scenarios.

Compared with conventional linear car-following model, distance inverse model, memory function model, expected distance model, and physiological-psychological model, AI-based car following models are prominent and have outstanding advantages in dealing with nonlinear problems through algorithms such as CNN, RL, and inverse RL (IRL). For example, Dai *et al.* [32] proposed to use RL to control longitudinal behaviors of AVs. Later, surrounding vehicles' trajectories (especially with human drivers) are predicted and tracked to help make safer car following behaviors. For example, Gong and Du [33] introduced curve matching learning algorithm to predict leading human-driven vehicles' trajectories to facilitate making the cooperative platoon control for a mix traffic flow including AVs and human-driven vehicles. Meanwhile, ML/DL approaches can also directly use images, vehicle metrics such as speed, lateral information, steering angle as the input, and control the output

speed and steering angle to perform car following behaviors. For example, Onieva *et al.* [34] combined the fuzzy logic and genetic algorithm for the lateral control of steering wheels. Li *et al.* [35] used the abstractions of road conditions as the input and the vehicle makes driving decision based on speed and steering output from a six-layer NN. Chen *et al.* [36] proposed a rough-set NN to learn decisions from excellent human drivers to make car-following decision. The test on virtual urban traffic simulations proved the better convergence speed and decision accuracy of the proposed approach than that of NN. RL and IRL can gradually learn from surrounding environments, with the benefit of using reward function that evaluates how AVs ought to behave under different environments. For example, Gao *et al.* [37] introduced the IRL to estimate the reward function of each driver and proved its efficiency via simulation in a highway environment.

After the multilayer perceptron being used to guide vehicle steering [38], various AI approaches such as CNN, recurrent NN (RNN), LSTM, and RL have been introduced. For example, Eraqi *et al.* [39] introduced a convolutional LSTM to learn from camera images to decide steering wheel angles. The validation on comma.ai dataset showed that the proposed approach can outperform the CNN and residual neural network (Resnet). Other than simulation, real-world tests have been implemented by Nvidia. Bojarski *et al.* [21] proposed the PilotNet to output steering angles given road images as input. Road tests demonstrated that the PilotNet can perform lane keeping regardless of the presence of lane markings.

Further, cooperative negotiation among following AVs have also been examined and found to help improve the control performance. Information can pass through leading AVs and following AVs to make more efficient decision [40], [41]. For example, Kim *et al.* [40] investigated the impact of cooperative perception and relevant see-through/lifted-seat/satellite views among leading and following vehicles. Given the extended perception range, situation awareness can be improved on roads. The augmented perception and situation awareness capability can contribute to better autonomous driving in terms of decision making and planning such as early lane changing and motion planning. In addition, safety issues such as intrusion detection have been explored [42].

### C. Current Evaluation Practices

The current evaluation practices can be categorized into three types: 1) dataset based; 2) simulation based; and 3) field test based. Given public datasets such as the German traffic signs and the KITTI dataset, the performance of AI-based approaches were examined. Meanwhile, simulation-based practices used software such as MATLAB/Simulink, TORCS, and CarSim to simulate traffic scenarios and vehicle movements. However, there exists a large gap between such simulated scenarios and real-world scenarios due to ignored hidden aspects such as inclement weather, market penetration ratio of AVs, and human-driven vehicles. In addition, directly using vehicle states such as operating speed and distance to other vehicles archived in simulation ignores the perception errors of AVs. Finally, only few of recent approaches have

implemented validation under real-world simplified scenarios such as driving tests on university campus roads [20], [21].

## V. MAJOR CHALLENGES FOR AI-DRIVEN AV APPLICATIONS

### A. Sensor Issues Affecting the Input of AI Approaches

The success of AI approaches largely relies on the quality of the sensor data as the input. Sensors used in AV applications fall into three main categories: self-sensing, localization, and surrounding-sensing. Self-sensing uses proprioceptive sensors to measure the current state of the ego-vehicle, including AV's velocity, acceleration, and steering angle. Proprioceptive information is commonly determined using pre-installed measurement units, such as odometers and inertial measurement units (IMUs). Localization, using external sensors such as GPS or dead reckoning by IMU readings, determines an AV's global and local positions. Lastly, surrounding-sensing uses exteroceptive sensors to perceive road markings, road slope, traffic signs, weather conditions, and the state (position, velocity, acceleration, etc.) of obstacles (e.g., other surrounding vehicles). Furthermore, proprioceptive and exteroceptive sensors can be categorized as active and passive sensors. Active sensors emit energy in the forms of electromagnetic waves, and examples include sonar, radar, and LIDAR. On the other hand, passive sensors perceive electromagnetic waves in the environment and examples include light-based and infrared cameras. Detailed applications of sensors used in AVs are listed in Table I. The most frequently used sensors are camera vision, LIDAR, radar, and sonar sensors.

Cameras are one of the most critical components for perception. Typically, the spatial resolution of a camera in AVs ranges from 0.3 megapixels to two megapixels. A camera can generate the video stream at 10–30 fps and captures important objects such as traffic light, traffic sign, obstacles, etc., in real time [4]. A LIDAR system scans the surrounding environment periodically and generates multiple measurement points. This “cloud” of points can be further processed to compute a 3D map of the surrounding environment. Besides cameras and LIDAR, radar and ultrasonic sensors are also widely used to detect obstacles. Their detection areas can be short-range and wide-angle, mid-range and wide-angle, and long-range and narrow-angle [43]. It should be noted that most AVs integrate multiple types of sensors due to two important reasons. First, fusing the data from multiple sensors improves the overall perception accuracy. For example, a LIDAR system can quickly detect the regions of interest and a camera system can apply highly accurate object detection algorithms to further analyze these important regions. Second, different layers of sensors with overlapped sensing areas provide additional redundancy and robustness to ensure high reliability. For example, Jo *et al.* [44] proposed to fuse data from cameras and LIDAR sensors and achieved better results under poor light conditions.

Abnormal conditions such as severe weather pose precision and accuracy issues on sensor outputs, and can be (partially) addressed by some of the aforementioned sensor fusion technologies. For example, perception under poor weather

TABLE I  
DIFFERENT SENSORS USED IN AV DEVELOPMENT

Vehicle	A <sup>#</sup>	B	C	D	E	F
Audi's Research Vehicle [48]	Y	Y	Y	Y	Y	Y
Ford: Hybrid Fusion [49]	Y			Y	Y	Y
Google: Toyota Prius [50]	Y	Y		Y	Y	
Nagoya and Nagasaki University's Open ZMP Robocar HV (Toyota Prius) [51]	Y			Y		
Volvo: (Stoklosa, Cars) [52]	Y		Y	Y	Y	Y
Apple: Lexus RX450h SUVs [53]	Y		Y	Y	Y	Y
DIDI's research vehicle [54]	Y		Y	Y	Y	Y
Infiniti Q50S [55]	Y				Y	Y
Lexus RX [56]	Y				Y	Y
Volvo XC90 [57]	Y				Y	Y
BMW750i xDrive [58]	Y	Y	Y		Y	Y
Mercedes-Benz E & S-Class [55]	Y	Y	Y		Y	Y
Otto Semi-Trucks [59]	Y			Y	Y	
Renault GT Nav [60]	Y				Y	Y
Tesla Model S [61]	Y				Y	Y
Baidu Apollo [62]	Y				Y	Y

<sup>#</sup>Note: A: Vision; B: Stereovision; C: IR Camera; D: LIDAR; E: Radar; and F: Sonar.

conditions such as snow, heavy rain, and fog is an important AV research topic as these scenarios continuously prove to be problematic even for human drivers. In snowy conditions, it has been found that both vision-based and LIDAR-based systems have extreme difficulties. The "heaviness" or density of the snow has been found to affect the LIDAR beams and cause reflections off snowflakes that lead to "phantom obstacles" [45]. Several approaches such as sensor fusion of camera, LIDAR, and radar sensors [45] and taillight recognition [46] were proposed. Perception is also problematic under different environment conditions such as complex urban areas and unknown environments. As such, Chen *et al.* [36] introduced rough set theory to deal with some possible noise and outliers.

As shown in Table I, the sensors chosen by different stakeholders are noticeably different. Several key questions should be answered in determining the priority of specific sensors. For example, will the sensor need to work under severe weather conditions? Should the AV sensors be cost effective to sacrifice some level of accuracy, and so on? In practices, for examples, the AVs in the DARPA Urban Challenge were generally outfitted with multiple, expensive LIDAR and radar sensors, but lacked sonar sensors, since the challenges did not focus on low-speed and precise automated parking (e.g., parallel parking). In contrast, many commercial vehicles, such as the Tesla Model S and the Mercedes-Benz S class, include ultrasonic (sonar) sensors for automated parking but not LIDAR to minimize cost. Infrared cameras, which are often used to detect pedestrians and other obstacles at night, are predominantly found on commercial vehicles [47].

In short, the discrepancy of sensors will lead to heterogeneous datasets gathered for serving AI approaches. Also, the quality and reliability of different sensor data should be noted. Therefore, when designing an AI approach, the

issues associated with sensor inputs such as data availability and data quality need to be thoroughly examined.

#### B. Complexity and Uncertainty

AVs are complex systems that involve lots of perceptions and decision making. The implementation of AI approaches unavoidably involves uncertainty in performing these tasks. In general, the uncertainty associated with AI approaches can be grouped in two aspects: 1) uncertainty induced data issues: almost all data collected by the sensor systems will have noise that can bring unpredictable errors in the input for AI models; and 2) uncertainty brought by the implemented models [63].

The previous section has discussed that the used sensors in AV development may not reliably work under different conditions. Thus, the failure or inappropriate working status will induce uncertainty in perceiving environments. To reduce such uncertainty, approaches such as false detection and isolation methods have been used in some research. For example, Pous *et al.* [64] applied analytical redundancy and nonlinear transformation methods to assess sensor metrics for determining faulty or deviant sensor measurements. Shafaei *et al.* [7] considered RL to determine abnormal input due to missing data, distribution shift, and environmental changes.

The uncertainties brought by AI models are rooted in their functional requirements. In AI algorithms, a major assumption is that the training data collected from sensors can always meet the needs of the functioning algorithms. In addition, the used models are supposed to capture the operational environment constantly. These assumptions are often not guaranteed in real-world operations of AVs as the operational environment is highly unpredictable and dynamically changing [7].

In addition, the complexity and uncertainty can be triggered on connected AVs due to malicious attacks that can be

launched from any location randomly. Also, a malicious attack does not require physical access to AVs. Thus, malicious attack and intrusion detection is critical in connected AVs. AI approaches such as NN and fuzzy logic have been explored in external communication systems [42], and it is expected to develop more efficient AI approaches that can well address more complex scenarios if many AVs were connected.

### C. Complex Model Tuning Issues

Due to the relative simplicity, some research on AVs primarily used ML approaches such as particle filter, random forest, SVM. Given many successful applications of DL approaches in other transportation areas such as traffic flow prediction, some researchers explored emerging AI approaches such as CNN, LSTM, and DBN [23], [65]–[67]. However, there are still some issues when using advanced learning algorithms for real-time AV decision making. Firstly, DL and RL approaches often employ more complex model structures and thus the parameter calibration is computationally expensive. Currently, there lacks the guidance on the selection of the model hyper-parameters such as the number of hidden layers, hidden units, and their initial weighting values. This means that the end user must design a suitable model tuning strategy by a costly trial-and-error analysis when used on AVs to decide angles of the steering wheel. Secondly, the supervised learning algorithms such as SVM and NN can not well learn from unlabeled environment. For example, the uncertainty issue mentioned before will be especially severe when the training data significantly differs from testing data, which is expected to be the case in real-world traffic conditions. Training an AV to perceive surroundings in suburban/rural areas and test it in complex urban scenarios will potentially raise safety issues due to uncovered training scenarios (e.g., pedestrian presence). Chen *et al.* [36] used rough set to reduce the influence of noise and uncertain data on NN models, but the learning ability with unexpected scenes such as mobile work zones remains an issue. Last but not least, the transferability of the trained scenarios will also be a challenge for AI approaches to be involved in every sector of the AV applications.

To learn from drivers and extract key factors, RL approaches have also been explored [37], [68]–[75]. RL categorizes vehicle metrics as diverse states and define rewards and policy to control AV behaviors. The use of RL requires knowledge of the reward function, which needs to be carefully designed. An alternative is to learn the optimal driving strategy using demonstrations of the desired driving behavior. For example, Isele *et al.* [72] proposed a deep RL structure to navigate AVs drive across intersections with occlusions. Deep Q-network learns the relationship among rewards and inputs. Although one can approximately recovers expert driving behavior using this approach, the matching between the optimal policy/reward and the features is ambiguous. Special attention needs to be paid to learn the complicated driving behavior with preference on certain actions. In short, more efforts are needed to enhance AI approaches for specific autonomous applications and desired

maneuvers.

### D. Solving the Hardware Problem

The AI implementations in AV applications require demanding computational resources, and therefore heavily rely on the computing devices [4]. Diverse computing architectures have been proposed, including multicore central processing unit (CPU) system, heterogeneous system, distributed system, etc. Multiple computing devices are usually integrated into the AV system. For example, the AV designed by Carnegie Mellon University deployed four Intel Extreme Processor QX9300s with mini-ITX motherboards equipped with CUDA-compatible graphics processing units (GPUs) [76]. Meanwhile, BMW deployed a standard personal computer and a real-time embedded computer (RTEPC) [77]. PC fused sensor output data to percept surrounding environments and RTEPC was connected to the actuators for steering, braking, and throttle control [77]. While the aforementioned hardware systems have been successfully applied for real-time operations of autonomous driving, the field test performance (measured by accuracy, throughput, latency, power, etc.) and cost (measured by price) remain noncompetitive for commercial deployment. Hence, there still needs efforts to advance hardware implementations to address both the technical challenges and the market needs for AI applications in AVs development.

The major challenges for such computing devices rely on GPUs, CPUs, and field-programmable gate array (FPGA). GPUs are originally designed to manipulate computer graphics and image processing, e.g., to meet the need for running high-resolution 3D computer games. With the emergence of DL, GPUs draw wide attention due to its inherent parallel structure that can achieve substantially higher efficiency compared with CPUs when processing large volumes of data in parallel. Thus, it has been considered as promising computing devices for implementing AI approaches for AV applications. Nonetheless, GPUs often consume high energy and pose significant amount of challenges for additional power system load and heat dissipation. Great efforts have been made to address the commercial application of GPUs. For instance, NVIDIA released its advanced mobile processor Tegra X1 implemented with a Maxwell 256-core GPU and an ARM 4-core CPU [4]. It should be noted that Tegra X1 has already been deployed in NVIDIA's DRIVE PX Auto-Pilot platform for autonomous driving.

On the other hand, a FPGA is a reconfigurable integrated circuit to implement diverse digital logic functions. FPGAs are programmed for given applications with their specific computing architectures and for different purposes that result in a reduced non-recurring engineering cost. Hence, it leads to a higher computing efficiency and lower energy consumption compared to CPUs/GPUs aimed at general-purpose computing. For instance, Altera released its Arria 10 FPGAs manufactured by 20 nm technology and gained up to 40 percent lower power compared with previous generation FPGAs. Meanwhile, its built-in digital signal processing (DSP) units enable wide applications such as radar designs and motor control applications. Table II illustrates the energy



efficiency of CPU, GPU, and FPGA for ALEXNet. It suggests that FPGA outperforms CPU and GPU in terms of the higher energy efficiency measured by the throughput over power. It also should be noted that new advanced system architectures have also been developed to facilitate efficient implementation of DL approaches. For instance, Google proposed tensor processing unit (TPU) and validated that it can achieve on average 15 times–30 times faster speed than its contemporary CPU or GPU [78], with TOPS/Watt [79] about 30 times–80 times higher. However, it should be mentioned that there still exists large gaps for hardware improvement in supporting real-time implementations of AI approaches for large-scale commercial applications in AVs.

TABLE II  
COMPARISON OF CPU, GPU, AND FPGA ACCELERATORS FOR CNN

Device	Throughput (frame/s)	Power	Efficiency (frame/s/W)
CPU E52699 Dual Xeon [80]	1320	321	4.11
GPU Tesla K40 [81]	824	235	3.5
FPGA Arria 10 GX1150 [80]	1200	130	9.27
FPGA Arria 10 GX1150 + [81]	233	25	9.32
FPGA Virtex7 VX690T [82]	826	126	6.56
Virtex7 VX690T+[83]	446	25	17.84

## VI. OPPORTUNITIES AND FUTURE RESEARCH

Other than examining the issues with respect to AI use in AV systems in existing literature(e.g., studies shown in Table III), this paper also explores some potential opportunities and research directions that deserve more investigations in future work.

### A. Emerging Real-Time High-Definition Maps Associated With Big Data and HPC

With the development of sensor technologies, many data sources are becoming available. This provided many opportunities to revisit the perception and decision making of AVs under diverse environments. As illustrated in Fig. 3, AVs can collect high-frequency data via sensors such as radar, LIDAR, and cameras to better perceive surroundings. Such big data have shown potential to improve AV performance under complicated conditions [44]. Meanwhile, the development of high performance computing (HPC) devices helps accelerate commercial implementation of the complex AI algorithms on AVs.

Given the incorporation of such big data, HPC, and other relevant information including infrastructure sensor measurements, a promising application is the real-time high-definition (HD) maps that serve as the key input of the AI approaches, interacts with AVs, and reflects real world scenarios. HD Mapping startups have turned to crowdsourcing, sought to lower the cost of HD mapping software and hardware, or focused only on technical services for HD map development. Diverse crowdsourcing approaches have been introduced to construct a HD map. For example, Iv15 applies computer vision technology and encourages Uber drivers to use its app Payver to collect data, especially

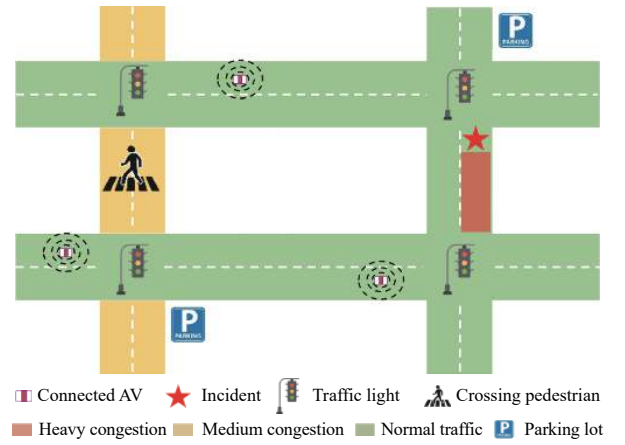


Fig. 3. AV driving with HD maps.

recording videos for rewards [84]. Thus, AVs can use such HD maps as the input of the AI approaches and further augment functions such as high-precision localization, environment perception, planning and decision making, and real-time navigation cloud services to autonomous vehicles. For example, AVs can quickly archive input of traffic signal lights and surrounding vehicles via HD maps, then use DL and/or RL approaches to implement direct perception and decision making with a reduced software and hardware cost. In addition, AVs can make an informed path planning when driving in unfamiliar environments. As shown in Fig. 3, AVs can quickly select the suitable parking lot by taking information such as road congestion, distance into consideration, and drive toward the destination assisted by markings in the HD map. Thus, it is expected that an efficient and valid solution to establish real-time digital maps can leverage the value of big data and HPC, and significantly improves the data quality when serving as the input of AI approaches to further increase the performance of AVs.

### B. Enhanced Simulation Testbed with AR/VR

The testing of various AI approaches in developing AV applications is time-consuming and expensive. This stimulates the opportunities for leveraging simulation models to generate extensive data and test the developed AI algorithms. Many existing simulation-based research on AVs use platforms such as MATLAB and CarSim to simulate AVs and road environments. However, such simulation testbeds lack the interaction with components such as crossing pedestrians and drivers of ordinary vehicles. The low fidelity of these testbeds can not generate high-quality and realistic data to train AI models to make better decisions in various scenarios. For example, the gap between reactions of simulated pedestrians/drivers and realistic actions would be crucial when analyzing the potential safety impacts with the designed AI algorithms. Alternatively, it is promising to leverage augmented reality (AR)/virtual reality (VR) to get realistic human behaviors for training designed AI algorithms in estimating the potential safety issues of AVs [85], [86]. For example, researchers can simulate the scenario when AVs cross the urban downtown area with lots of pedestrians wearing VR/AR devices. This creates rich data for training the



AI algorithms for understanding the possible scenes. Many of the following questions may benefit from the more realistic simulation results: how should an AI algorithm perceive such complex surroundings and recommend decisions such as yielding to crossing pedestrians, identifying aggressive ordinary vehicles, and path planning? How should AVs learn from people's behavior and evolve their AI approaches to reduce collision risk? In summary, an accelerated simulation platform such as Fig. 4 is beneficial to develop extensive scenarios for testing the AI approaches prior to field implementations.

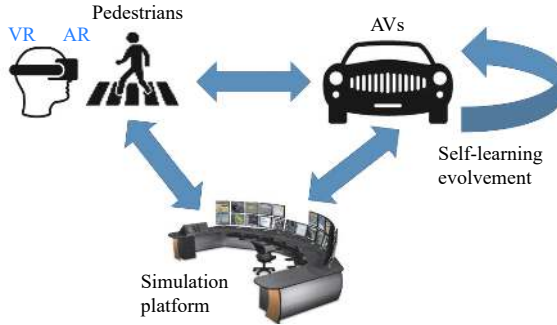


Fig. 4. Enhanced simulation platform for accelerated testing.

In general, mixed reality (MR) prototyping with AR and VRs provides a safe testing platform for experimenting the performance of AI algorithms adopted by AVs, which are yet to be perfected. For example, some researchers have used MR to study human-machine teaming and has successfully paired human with autonomous aerial vehicles [87]. The level of reality can vary and be improved with the use of geo-specific terrains. AR/VR can also be used to test risky scenarios without exposing human in danger and to optimize the relevant AI approaches for AVs. In particular, this may facilitate the use of RL for AVs to imitate human drivers' decision making. For example, AVs can use RL approaches to interact with actual pedestrians/drivers wearing AR/VR headsets, and optimize its corresponding steering angles and velocity to reduce collision risk. Human participants' behavior can be collected and served as the training/testing data to support AI-based AVs' decision making towards enhanced safety and operational performance. It is expected that many of the data issues associated with the use of AI algorithms will be mitigated with the AR/VR generated simulation data.

### C. 5G Connected AVs

Connected AVs (e.g., autonomous truck platoon) can implement cooperative decision making, perceptions, and achieve a better performance [40], [41]. Communication technologies such as dedicated short-range communications (DSRC) are limited by the bandwidth to guarantee a high data rate link and are prone to malicious attack. The sub-6GHz bands used by 4 generation long term evolution-advanced (4G LTE-A) systems are highly congested, which leave limited space for AVs. The limited communication capability can impede the implementation of many AI algorithms that requires large volume of real-time data collection and

transmission. This stimulates the 5G community to leverage the underutilized mmWave bands of 10–300 GHz [88]. It has been known that mmWave bands are subject to issues such as high path loss and penetration loss, which hinder their widely application. However, latest studies have shown the improved potential of the mmWave bands by taking advantages of directional transmission, beamforming, and denser base stations [88]. This will be important for providing reliable and sufficient connectivity for AVs.

Given the abundant bandwidth, it has been highlighted that the necessity of multi-Gbps links to enable 5G communication of AVs [89]. Transmitting a large volume of data collected by sensors such as radar and LIDAR is expected to be ensured with a relative low latency in the context of 5G communication. Thus, 5G-connected AVs are expected to better support the AI algorithms for environment sensing, perception, and decision making [88]. As illustrated in Fig. 5, the obstacle (incident) occurs in the left lane and is perceived by an AV. Thus, the following AVs can acquire and respond to such safety information faster with their built-in algorithms. It should be noted that each AV serves as an intelligent agent and negotiate with each other. The platoon of multiple AVs that communicate with each other via 5G technology can constitute a multi-agent system. In order to implement such cooperated AVs, there still exists several challenging issues that need to be addressed. For example, which AI approach should be leveraged to select the optimal beam to compensate for the high path loss? How should AVs build the network routing and transmit messages between each other? How should AVs make cooperative decision making such as lane changing, deceleration, and acceleration? How should the multi-agent system composed of AV agents apply AI approaches to learn from the environment and negotiate with each other? The upcoming 5G applications will undoubtedly stimulate more thinking about these questions in AV development.

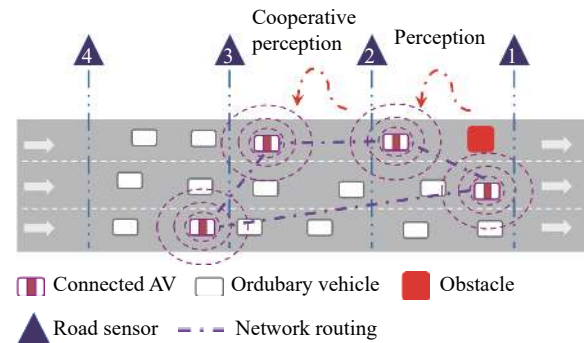


Fig. 5. Connected AVs with 5G communication.

## VII. CONCLUSIONS

A number of studies were published on the AI-related work in AV research community. Despite a substantial amount of research efforts, there still exists challenging problems in using AI for supporting AVs' perception, localization and mapping, and decision making. Many AI approaches such as ML, DL, and RL solutions have been applied to help AVs

better sense surroundings and make human-like decisions in situations such as car following, steering, and path planning. However, such applications have been inherently limited by data availability and data quality, complexity and uncertainty, complex model tuning, and hardware restrictions, and therefore still need continuous endeavor in these avenues. Therefore, this paper has provided a summary of current practices in leveraging AI for AV development. More importantly, some of the challenging issues in using AI for meeting the functional needs of AVs have been discussed. The future efforts that can help augment the use of AI for supporting AV development have been identified in the context emerging technologies: 1) big data, HPC, and high resolution digital map for enhanced data collection and processing; 2) AR/VR enhanced platform for constructing accelerated test scenarios; and 3) 5G for low-latency

connections among AVs. These research directions hold considerable promise for the development of AVs. Combined with the refinements of AI approaches, one can expect more opportunities will emerge and offer new insights into commercial and widespread AV applications in real world. Thus, it also deserves special attention to the business, economic, and social impacts accompanied with the involvement of AI and AVs.

#### ACKNOWLEDGEMENTS

The authors appreciate Prof. Li Da Xu at Old Dominion University (ODU) and Prof. MengChu Zhou at New Jersey Institute of Technology (NJIT) for their great comments and suggestions that greatly helped develop this paper.

#### APPENDIX

TABLE III  
SUMMARY OF IDENTIFIED KEY REFERENCES

Ref.	Key input	A <sup>†</sup>	B	C	D	E	F	Test scenario	Method
[28]	Digitized map				Y		Y	Simulation	Learning support machine
[12]	GPS, sensors, traffic signals	Y	Y	Y				Laboratory test in Carnegie Mellon University	Adaptive randomized Hough transform algorithm
[32]	Position, engine traction force, and other relevant vehicle states				Y	Y	Y	Simulation	Fuzzy inference system, Q estimator network (RL)
[13]	Velodyne LIDAR sensor	Y	Y	Y		Y	Y	Urban environments (Stanford campus and a port town in Alameda, CA)	Bayesian model, Particle filter
[34]	Lateral and angular information		Y		Y	Y	Y	Test in driving zone	Genetic algorithm, Fuzzy Logic
[27]	Vehicle trajectories			Y	Y	Y		Simulation	Clustering
[30]	Kinetic sensor with 3D images	Y	Y	Y	Y	Y	Y	Indoor and Urban environments	ANN, Finite State Machine
[46]	Image	Y						Test with video	SVM, ML
[40]	Image	Y	Y	Y	Y	Y	Y	Test in university	HMM
[18]	Image	Y	Y					Image dataset in Japan, USA, and France	Spatial clustering, CNN
[19]	Image	Y	Y		Y	Y	Y	TORCS, KITTI dataset	CNN
[20]	Camera (left, center, right)	Y	Y	Y	Y	Y	Y	SimulationOn road test (10-mile)	CNN
[90]	Front-face cameraAngle of steering wheel/indicator braking				Y	Y	Y	Racing car simulator with/without traffic	Safe imitation learning
[68]	Speed, location				Y	Y	Y	Simulation with double merge scenario	Multi-agent DRL
[91]	Image	Y	Y	Y				Public traffic light data	PCA net, tracking
[92]	Image, LIDAR	Y	Y	Y	Y	Y	Y	Field test on roundabouts	Classification, ML
[43]	Radar	Y						Field test on road	Naïve Bayesian estimator
[93]	Image	Y	Y					KITTI dataset	CNN, SVM
[45]	Radar, LIDAR, camera, GPS, odometry, and inertial measurement sensors	Y	Y					Field testAdverse weather and light conditions	Particle filter, Kalman filter
[69]	Speed, location				Y	Y	Y	TORCS simulator	DRL
[21]	Image	Y	Y	Y		Y		Human-driven test car	Deep CNN
[70]	Image, vehicle, state					Y		On ramp merge, simulation	LSTM, DRL
[94]	Camera (left, center, right)	Y	Y	Y				Unity, TORCS simulator	CNN
[39]	Image					Y		Comma.ai dataset	CNN, LSTM
[64]	Odometric measurements	Y						Simulation	Nonlinear transformation Decision Process
[23]	Conceptual input						Y	Conceptual Framework	DNN, ML
[95]	Moving directions, lane change				Y		Y	Simulation	Swarm intelligence
[15]	Image	Y						Traffic sign dataset	CNN kernel, DP-KELM
[96]	Image	Y	Y					Vehicle turn signal	CNN tracking
[97]	LIDAR	Y	Y	Y				Obstacle detection	Segmentation 3-d filter
[25]	Image, ultrasound sensors				Y			Simulation	GBRF

TABLE III (continued)  
SUMMARY OF IDENTIFIED KEY REFERENCES

Ref.	Key input	A*	B	C	D	E	F	Test scenario	Method
[98]	Camera+2/3D LIDAR	Y	Y	Y				Test in university	KNN, SVM, naïve Bayesian classifier
[29]	GPS, camera	Y	Y	Y	Y			Off-road image	Fuzzy SVM, general regression NN
[99]	Path, state				Y		Y	Carsim	Random forest, particle filter
[36]	Key factor of driver behavior, motion data					Y	Y	SimulationCar following	Rough set, NN
[100]	Lateral tier force, vehicle parameter	Y	Y	Y	Y	Y	Y	Field test on road	Mivar expert system
[101]	Image	Y	Y					Virtual, INRIA, Daimler dataset	Deep CNN
[35]	KITTI datasetImage	Y	Y	Y		Y	Y	TORCS	CNN, DNN
[42]	Kyoto dataset	Y					Y	Intrusion detection	DNN
[17]	KITTI datasetImage	Y	Y					KTTI dataset	Cartesian product based multi-task learning
[72]	Location, speed					Y	Y	SUMO simulation	DQN
[88]	Vehicles' beam selection						Y	Simulation considering 5G technology	Fast machine learning
[63]	Image	Y	Y					SIM200k dataset, GTA dataset, KITTI dataset	Random forest classifier
[102]	Image	Y						GTSRB, GTSDB dataset	CNN
[103]	Conceptual sensor	Y	Y	Y		Y	Y	Conceptual Framework	AI
[104]	Control messages, media, radar sensor	Y	Y	Y	Y	Y	Y	Simulation	LSTM, DBN
[35]	Image	Y	Y	Y	Y	Y	Y	TORCS Simulation	CNN, DNN
[105]	Vehicle states					Y	Y	Simulation, Matlab, C++	State based model, NN
[63]	Camera	Y						SIM2000, GTA, KITTI Perception failure	Off-the-shelf binary classifier
[106]	Image	Y						Lane detection, Caltech/Beijing Lane dataset	CNN
[102]	Image	Y						German traffic sign dataset	Weight-multi CNN
[107]	LIDAR, camera	Y	Y	Y				KITTI dataset	CNN, SVM
[37]	State				Y	Y	Y	Simulation, Car following	IRL
[108]	Velocity, degree					Y		Lateral stability controlCarsim, WEKA software	C4.5 algorithm
[66]	LIDAR				Y	Y	Y	Simulation	DNN for collision prediction
[109]	Sensor	Y	Y					Drive in Urban environment	Recurrent NN
[74]	State of position				Y	Y	Y	OPENAI simulation	RL
[41]	Speed of vehicle platoon				Y	Y	Y	Matlab simulation	NARX network
[73]	3D point clouds by LIDAR	Y	Y					Field test of rural and road scenarios	SVM
[16]	Image	Y	Y	Y				KITTI and PASCAL2007 car dataset	AlexNet, GoogleNet, CNN, region-of-interest voting
[31]	Vehicle dynamicsLongitude/latitude dynamics				Y	Y	Y	Matlab, Carsim	RBF, NN, fuzzySliding mode control
[110]	Image	Y						German traffic sign recognition benchmark	CNN(WAF-LeNet)
[111]	Image	Y						Segmentation based on image dataset	Convolutional residual NN, Pyramid pooling
[22]	Image	Y	Y					Multi-sensor SLAM based on VL-CMU-CD and Tsunami and Google Street View dataset	Deep deconvolution NN
[112]	Right/left image	Y	Y	Y				Malaga stereovision urban datasetDaimler urban segmentation dataset	DBM auto-encoder SVM
[113]	Image	Y	Y	Y		Y		TORCS dataset	CNN
[114]	Image, LIDAR	Y	Y	Y				China SSMCAR dataset	Single short multi-box detector (CNN)
[75]	Vehicle state				Y			Policy simulation	RL, deep IRL
[115]	Driving style, Vehicle state				Y	Y	Y	Matlab	GMM
[116]	Image	Y	Y	Y				CamVid dataset Semantic segmentation	Important aware loss, DL
[117]	Image	Y	Y	Y	Y			Real and artificial traffic scenes	Auto-encoder, generative adversarial network, CNN, LSTM

\*Note: A: Perception; B: Localization and mapping; C: Object prediction; D: Path planning; E: Steering; and F: Decision making.



## REFERENCES

- [1] NHTSA, "Traffic safety facts 2015," National Highway Traffic Safety Administration, U.S. Department of Transportation, Washington, USA, 2017. [Online]. Available: <https://crashstats.nhtsa.dot.gov/Api/Public/ViewPublication/812384>.
- [2] M. Johnson-Roberson, C. Barto, R. Mehta, S. N. Sridhar, K. Rosaen, and R. Vasudevan, "Driving in the matrix: can virtual worlds replace human-generated annotations for real world tasks?," in *Proc. IEEE Int. Conf. Robotics and Automation*, Singapore, 2017.
- [3] A. Taeihagh and H. S. M. Lim, "Governing autonomous vehicles: emerging responses for safety, liability, privacy, cybersecurity, and industry risks," *Transp. Rev.*, vol. 39, no. 1, pp. 103–128, 2019.
- [4] W. J. Shi, M. B. Alawieh, X. Li, and H. F. Yu, "Algorithm and hardware implementation for visual perception system in autonomous vehicle: a survey," *Integration*, vol. 59, pp. 148–156, Sept. 2017.
- [5] C. Katrakazas, M. Quddus, W. H. Chen, and L. Deka, "Real-time motion planning methods for autonomous on-road driving: state-of-the-art and future research directions," *Transp. Res. C Emerg. Technol.*, vol. 60, pp. 416–442, Nov. 2015.
- [6] W. Schwarting, J. Alonso-Mora, and D. Rus, "Planning and decision-making for autonomous vehicles," *Annu. Rev. Control Robot. Auton. Syst.*, vol. 1, pp. 187–210, May 2018.
- [7] S. Shafaei, S. Kugele, M. H. Osman, and A. Knoll, "Uncertainty in machine learning: a safety perspective on autonomous driving," in *Proc. 1st Int. Workshop Artificial Intelligence Safety Engineering*, At Västerås, Sweden, 2018, pp. 458–464.
- [8] J. Y. Li, J. Zhang, and N. Kaloudi, "Could we issue driving licenses to autonomous vehicles?," in *Computer Safety, Reliability, and Security*, B. Gallina, A. Skavhaug, E. Schoitsch, and F. Bitsch, Eds. Cham, Germany: Springer, 2018, pp. 473–480.
- [9] G. V. Zitzewitz, "Survey of neural networks in autonomous driving," *Advanced Seminar SS 2017*, 2017.
- [10] D. Cireşan, U. Meier, J. Masci, and J. Schmidhuber, "Multi-column deep neural network for traffic sign classification," *Neural Netw.*, vol. 32, pp. 333–338, Aug. 2012.
- [11] W. Li, X. J. Jiang, and Y. X. Wang, "Road recognition for vision navigation of an autonomous vehicle by fuzzy reasoning," *Fuzzy Sets Syst.*, vol. 93, no. 3, pp. 275–280, Feb. 1998.
- [12] Q. Li, N. N. Zheng, and H. Cheng, "Springrobot: a prototype autonomous vehicle and its algorithms for lane detection," *IEEE Trans. Intell. Transp. Syst.*, vol. 5, no. 4, pp. 300–308, Dec. 2004.
- [13] A. Petrovskaya and S. Thrun, "Model based vehicle detection and tracking for autonomous urban driving," *Auton. Robots*, vol. 26, no. 2–3, pp. 123–139, Apr. 2009.
- [14] D. J. Fagnant and K. Kockelman, "Preparing a nation for autonomous vehicles: opportunities, barriers and policy recommendations," *Transp. Res. A Policy Pract.*, vol. 77, pp. 167–181, Jul. 2015.
- [15] Y. J. Zeng, X. Xu, D. Y. Shen, Y. Q. Fang, and Z. P. Xiao, "Traffic sign recognition using kernel extreme learning machines with deep perceptual features," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 6, pp. 1647–1653, Jun. 2017.
- [16] W. Q. Chu, Y. Liu, C. Shen, D. Cai, and X. S. Hua, "Multi-task vehicle detection with region-of-interest voting," *IEEE Trans. Image Processing*, vol. 27, no. 1, pp. 432–441, Jan. 2018.
- [17] Y. R. Chen, D. B. Zhao, L. Lv, and Q. C. Zhang, "Multi-task learning for dangerous object detection in autonomous driving," *Inf. Sci.*, vol. 432, pp. 559–571, Mar. 2018.
- [18] V. John, K. Yoneda, Z. Liu, and S. Mita, "Saliency map generation by the convolutional neural network for real-time traffic light detection using template matching," *IEEE Trans. Comput. Imaging*, vol. 1, no. 3, pp. 159–173, Sept. 2015.
- [19] C. Y. Chen, A. Seff, A. Kornhauser, and J. X. Xiao, "Deepdriving: learning affordance for direct perception in autonomous driving," in *Proc. IEEE Int. Conf. Computer Vision*, Santiago, Chile, 2015.
- [20] M. Bojarski, D. Del Testa, D. Dworakowski, B. Firner, B. Flepp, P. Goyal, L. D. Jackel, M. Monfort, U. Muller, J. K. Zhang, X. Zhang, J. K. Zhao, and K. Zieba, "End to end learning for self-driving cars," *arXiv: 1604.07316*, Apr. 2016.
- [21] M. Bojarski, P. Yeres, A. Choromanska, K. Choromanski, B. Firner, L. Jackel, and U. Muller, "Explaining how a deep neural network trained with end-to-end learning steers a car," *arXiv: 1704.07911*, Apr. 2017.
- [22] P. F. Alcantarilla, S. Stent, G. Ros, R. Arroyo, and R. Gherardi, "Street-view change detection with deconvolutional networks," *Auton. Robots*, vol. 42, no. 7, pp. 1301–1322, Oct. 2018.
- [23] H. J. Vishnukumar, B. Butting, C. Müller, and E. Sax, "Machine learning and deep neural network-artificial intelligence core for lab and real-world test and validation for ADAS and autonomous vehicles: AI for efficient and quality test and validation," in *Proc. Intelligent Systems Conf.*, London, UK, 2017, pp. 714–721.
- [24] M. Heimberger, J. Horgan, C. Hughes, J. McDonald, and S. Yogamani, "Computer vision in automated parking systems: design, implementation and challenges," *Image Vis. Comput.*, vol. 68, pp. 88–101, Dec. 2017.
- [25] G. Notomista and M. Botsch, "A machine learning approach for the segmentation of driving maneuvers and its application in autonomous parking," *J. Artif. Intell. Soft Comput. Res.*, vol. 7, no. 4, pp. 243–255, May 2017.
- [26] A. B. B. Kwame, C. Ryad, A. A. Yaw, and K. Frimpong, "An overview of nature-inspired, conventional, and hybrid methods of autonomous vehicle path planning," *J. Adv. Transp.*, vol. 2018, pp. 8269698, 2018.
- [27] J. Hardy and M. Campbell, "Contingency planning over probabilistic obstacle predictions for autonomous road vehicles," *IEEE Trans. Robot.*, vol. 29, no. 4, pp. 913–929, Aug. 2013.
- [28] S. Al-Hasan and G. Vachtsevanos, "Intelligent route planning for fast autonomous vehicles operating in a large natural terrain," *Rob. Auton. Syst.*, vol. 40, no. 1, pp. 1–24, Jul. 2002.
- [29] J. J. Chen, W. H. Jiang, P. Zhao, and J. F. Hu, "A path planning method of anti-jamming ability improvement for autonomous vehicle navigating in off-road environments," *Ind. Robot.*, vol. 44, no. 4, pp. 406–415, Jun. 2017.
- [30] D. O. Sales, D. O. Correa, L. C. Fernandes, D. F. Wolf, and F. S. Osório, "Adaptive finite state machine based visual autonomous navigation system," *Eng. Appl. Artif. Intell.*, vol. 29, pp. 152–162, Mar. 2014.
- [31] K. Akermi, S. Chouraqui, and B. Boudaa, "Novel SMC control design for path following of autonomous vehicles with uncertainties and mismatched disturbances," *Int. J. Dyn. Control*, [Online]. Available: <https://doi.org/10.1007/s40435-018-0478-z>.
- [32] X. H. Dai, C. K. Li, and A. B. Rad, "An approach to tune fuzzy controllers based on reinforcement learning for autonomous vehicle control," *IEEE Trans. Intell. Transp. Syst.*, vol. 6, no. 3, pp. 285–293, Sep. 2005.
- [33] S. Y. Gong and L. L. Du, "Cooperative platoon control for a mixed traffic flow including human drive vehicles and connected and autonomous vehicles," *Transp. Res. B Methodol.*, vol. 116, pp. 25–61, Oct. 2018.
- [34] E. Onieva, J. E. Naranjo, V. Milanés, J. Alonso, R. García, and J. Pérez, "Automatic lateral control for unmanned vehicles via genetic algorithms," *Appl. Soft Comput.*, vol. 11, no. 1, pp. 1303–1309, Jan. 2011.
- [35] L. Z. Li, K. Ota, and M. X. Dong, "Humanlike driving: empirical decision-making system for autonomous vehicles," *IEEE Trans. Veh. Technol.*, vol. 67, no. 8, pp. 6814–6823, Aug. 2018.
- [36] X. M. Chen, M. Jin, Y. S. Miao, and Q. Zhang, "Driving decision-making analysis of car-following for autonomous vehicle under complex urban environment," *J. Cen. South Univ.*, vol. 24, no. 6,

- pp. 1476–1482, Jun. 2017.
- [37] H. B. Gao, G. Y. Shi, G. T. Xie, and B. Cheng, “Car-following method based on inverse reinforcement learning for autonomous vehicle decision-making,” *Int. J. Adv. Robotic Syst.*, vol. 15, no. 6, pp. 1729881418817162, Oct. 2018.
  - [38] D. A. Pomerleau, “Alvinn: an autonomous land vehicle in a neural network,” in *Proc. Advances in Neural Information Processing Systems*, San Francisco, USA, 1989, pp. 305–313.
  - [39] H. M. Eraqi, M. N. Moustafa, and J. Honer, “End-to-end deep learning for steering autonomous vehicles considering temporal dependencies,” *arXiv: 1710.03804*, Nov. 2017.
  - [40] S. W. Kim, W. Liu, M. H. Ang, E. Frazzoli, and D. Rus, “The impact of cooperative perception on decision making and planning of autonomous vehicles,” *IEEE Intell. Transp. Syst. Mag.*, vol. 7, no. 3, pp. 39–50, 2015.
  - [41] L. Banjanovic-Mehmedovic, I. Butigan, F. Mehmedovic, and M. Kantardzic, “Hybrid automaton based vehicle platoon modelling and cooperation behaviour profile prediction,” *Tehnički Vjesnik*, vol. 25, no. 3, pp. 923–932, 2018.
  - [42] K. M. Ali Alheeti and K. McDonald-Maier, “Intelligent intrusion detection in external communication systems for autonomous vehicles,” *Syst. Sci. Control Eng.*, vol. 6, no. 1, pp. 48–56, 2018.
  - [43] M. Aki, T. Rojanaarpa, K. Nakano, Y. Suda, N. Takasuka, T. Isogai, and T. Kawai, “Road surface recognition using laser radar for automatic platooning,” *IEEE Trans. Intell. Transp. Syst.*, vol. 17, no. 10, pp. 2800–2810, Oct. 2016.
  - [44] J. Jo, Y. Tsunoda, B. Stantic, and A. W. C. Liew, “A likelihood-based data fusion model for the integration of multiple sensor data: a case study with vision and lidar sensors,” in *Robot Intelligence Technology and Applications 4*, J. H. Kim, F. Karray, J. Jo, P. Sincak, and H. Myung, Eds. Cham, Germany: Springer, 2017, pp. 489–500.
  - [45] P. Radecki, M. Campbell, and K. Matzen, “All weather perception: joint data association, tracking, and classification for autonomous ground vehicles,” *arXiv: 1605.02196*, May 2016.
  - [46] Z. Y. Cui, S. W. Yang, and H. M. Tsai, “A vision-based hierarchical framework for autonomous front-vehicle taillights detection and signal recognition,” in *Proc. 18th IEEE Int. Conf. Intelligent Transportation Systems*, Las Palmas, Spain, 2015, pp. 931–937.
  - [47] J. Van Brummelen, M. O'Brien, D. Gruyer, and H. Najjaran, “Autonomous vehicle perception: the technology of today and tomorrow,” *Transp. Res. C Emerg. Technol.*, vol. 89, pp. 384–406, Apr. 2018.
  - [48] J. M. Gitlin, “Assists, autopilot, and more: Ars talks about autonomous driving with audi.” [Online]. Available: <http://arstechnica.com/cars/2016/01/assists-autopilotand-more-ars-talks-about-autonomous-driving-with-audi/>.
  - [49] J. M. Gitlin, “Ars talks self-driving car technology with ford at ces.” [Online]. Available: <http://arstechnica.com/cars/2016/01/ars-talks-self-driving-technology-with-ford-at-ces/>.
  - [50] Google, “Google self-driving car project.” [Online]. Available: <https://www.mendeley.com/catalogue/google-selfdriving-car-project/>.
  - [51] S. Kato, E. Takeuchi, Y. Ishiguro, Y. Ninomiya, K. Takeda, and T. Hamada, “An open approach to autonomous vehicles,” *IEEE Micro*, vol. 35, no. 6, pp. 60–68, Dec. 2015.
  - [52] Volvo Car, “Self-driving car technology-intellisafe.” [Online]. Available: <http://www.volvocars.com/intl/about/our-innovation-brands/intellisafe/intellisafe-autopilot/this-is-autopilot/the-tech>.
  - [53] A. Webb, “Apple expands California self-driving test fleet to 27 cars.” [Online]. Available: <https://www.bloomberg.com/news/articles/2018-01-25/apple-expands-california-self-driving-test-fleet-to-27-cars>.
  - [54] DiDi, “Didi Chuxing can no. test self-driving cars in California.” [Online]. Available: <https://techcrunch.com/2018/05/14/didi-chuxing-can-now-test-self-driving-cars-in-california/>.
  - [55] D. Sherman, “Semi-autonomous Comparo! Tesla, BMW, Mercedes-Benz, and Infiniti.” [Online]. Available: <https://www.caranddriver.com/features/a15101943/semi-autonomous-cars-compared-tesla-vs-bmw-mercedes-and-infiniti-feature>.
  - [56] Lexus, “Lexus rx-safety.” [Online]. Available: <http://www.lexus.com/models/RX/safety>.
  - [57] Volvo, “Pilot assist.” [Online]. Available: <https://www.volvocars.com/en-th/support/manuals/v60/2019-late/driver-support/pilot-assist/pilot-assist>.
  - [58] BMW, “BMW connecteddrive: intelligent driving.” [Online]. Available: [http://www.bmw.com/com/en/insights/technology/connecteddrive/2013/driver\\_assistance/intelligent\\_driving.html](http://www.bmw.com/com/en/insights/technology/connecteddrive/2013/driver_assistance/intelligent_driving.html).
  - [59] J. Stewart, “\$30k retrofit turns dumb semis into self-driving robots.” [Online]. Available: <https://www.wired.com/2016/05/otto-retrofit-autonomous-self-driving-trucks>.
  - [60] Renault, “Autonomous vehicles.” [Online]. Available: <https://group.renault.com/en/innovation-2/autonomous-vehicle>.
  - [61] J. Golson, “Tesla’s autopilot system is reportedly getting more sensors.” [Online]. Available: <https://www.theverge.com/2016/8/11/12443310/tesla-autopilot-next-generation-radar-triple-camera>.
  - [62] Baidu, “Autonomous driving solution.” [Online]. Available: <http://apollo.auto/>.
  - [63] M. S. Ramanagopal, C. Anderson, R. Vasudevan, and M. Johnson-Roberson, “Failing to learn: autonomously identifying perception failures for self-driving cars,” *IEEE Robot. Autom. Lett.*, vol. 3, no. 4, pp. 3860–3867, Oct. 2018.
  - [64] N. Pous, D. Gingras, and D. Gruyer, “Intelligent vehicle embedded sensors fault detection and isolation using analytical redundancy and nonlinear transformations,” *J. Control Sci. Eng.*, vol. 2017, pp. 1763934, 2017.
  - [65] D. Zang, Z. H. Wei, M. M. Bao, J. J. Cheng, D. D. Zhang, K. S. Tang, and X. Li, “Deep learning-based traffic sign recognition for unmanned autonomous vehicles,” in *Proc. Inst. Mech. Eng. J. Syst. Control Eng.*, vol. 232, no. 5, pp. 497–505, May 2018.
  - [66] F. Mohseni, S. Voronov, and E. Frisk, “Deep learning model predictive control for autonomous driving in unknown environments,” *IFAC-PapersOnLine*, vol. 51, no. 22, pp. 447–452, 2018.
  - [67] Y. Q. Yang, Z. Wu, Q. Y. Xu, and F. B. Yan, “Deep learning technique-based steering of autonomous car,” *Int. J. Comput. Intell. Appl.*, vol. 17, no. 2, pp. 1850006, 2018.
  - [68] S. Shalev-Shwartz, S. Shammah, and A. Shashua, “Safe, multi-agent, reinforcement learning for autonomous driving,” *arXiv: 1610.03295*, Oct. 2016.
  - [69] A. E. L. Sallab, M. Abdou, E. Perot, and S. Yogamani, “Deep reinforcement learning framework for autonomous driving,” *Electron. Imaging*, vol. 2017, no. 19, pp. 70–76, 2017.
  - [70] P. Wang and C. Y. Chan, “Formulation of deep reinforcement learning architecture toward autonomous driving for on-ramp merge,” in *Proc. 20th IEEE Int. Conf. Intelligent Transportation Systems*, Yokohama, Japan, 2017, pp. 1–6.
  - [71] Z. Q. Qiao, K. Muelling, J. M. Dolan, P. Palanisamy, and P. Mudalige, “Automatically generated curriculum based reinforcement learning for autonomous vehicles in urban environment,” in *Proc. IEEE Intelligent Vehicles Symp.*, Changshu, China, 2018, pp. 1233–1238.
  - [72] D. Isele, R. Rahimi, A. Cosgun, K. Subramanian, and K. Fujimura, “Navigating occluded intersections with autonomous vehicles using deep reinforcement learning,” in *Proc. IEEE Int. Conf. Robotics and Automation*, Brisbane, Australia, 2018, pp. 2034–2039.
  - [73] M. Bellone, G. Reina, L. Caltagirone, and M. Wahde, “Learning traversability from point clouds in challenging scenarios,” *IEEE Trans. Intelligent Transportation Systems*, vol. 19, no. 1, pp. 296–305, Jan. 2018.
  - [74] T. Bécsi, S. Aradi, Á. Fehér, J. Szalay, and P. Gáspár, “Highway environment model for reinforcement learning,” *IFAC-PapersOnLine*, vol. 51, no. 22, pp. 429–434, 2018.

- [75] C. X. You, J. B. Lu, D. Filev, and P. Tsotras, "Advanced planning for autonomous vehicles using reinforcement learning and deep inverse reinforcement learning," *Rob. Auton. Syst.*, vol. 114, pp. 1–18, Apr. 2019.
- [76] J. Q. Wei, J. M. Snider, J. Kim, J. M. Dolan, R. Rajkumar, and B. Litkouhi, "Towards a viable autonomous driving research platform," in *Proc. IEEE Intelligent Vehicles Symp.*, Gold Coast, Australia, 2013, pp. 763–770.
- [77] M. Aeberhard, S. Rauch, M. Bahram, G. Tanzmeister, J. Thomas, Y. Pilat, F. Homm, W. Huber, and N. Kaempchen, "Experience, results and lessons learned from automated driving on Germany's highways," *IEEE Intell. Transp. Syst. Mag.*, vol. 7, no. 1, pp. 42–57, Spr. 2015.
- [78] N. P. Jouppi, C. Young, N. Patil, D. Patterson, G. Agrawal, R. Bajwa, S. Bates, S. Bhatia, N. Boden, A. Borchers, R. Boyle, P. I. Cantin, C. Chao, C. Clark, J. Coriell, M. Daley, M. Dau, J. Dean, B. Gelb, T. V. Ghaemmhami, R. Gottipati, W. Gulland, R. Hagmann, C. R. Ho, D. Hogberg, J. Hu, R. Hundt, D. Hurt, J. Ibarz, and A. Jaffey, "In-datacenter performance analysis of a tensor processing unit," in *Proc. 44th ACM/IEEE Annu. Int. Symp. Computer Architecture*, Toronto, Canada, 2017, pp. 1–12.
- [79] W. J. Shi, M. B. Alawieh, X. Li, H. F. Yu, N. Arechiga, and N. Tomatsu, "Efficient statistical validation of machine learning systems for autonomous driving," in *Proc. IEEE/ACM Int. Conf. Computer-Aided Design*, Austin, USA, 2016, pp. 1–8.
- [80] Intel, Efficient implementation of neural network systems built on FPGAs, and programmed with OpenCL™. [Online]. Available: [https://www.altera.com/en\\_US/pdfs/literature/solution-sheets/efficient\\_neural\\_networks.pdf](https://www.altera.com/en_US/pdfs/literature/solution-sheets/efficient_neural_networks.pdf).
- [81] K. Ovtcharov, O. Ruwase, J. Y. Kim, J. Fowers, K. Strauss, and E. Chung, "Accelerating deep convolutional neural networks using specialized hardware," 2015. [Online]. Available: <https://www.microsoft.com/en-us/research/wp-content/uploads/2016/02/CNN20Whitepaper.pdf>.
- [82] C. Zhang, D. Wu, J. Y. Sun, G. Y. Sun, G. J. Luo, and J. Cong, "Energy-efficient CNN implementation on a deeply pipelined FPGA cluster," in *Proc. Int. Symp. on Low Power Electronics and Design*, New York, USA, 2016, pp. 326–331.
- [83] Z. Q. Liu, Y. Dou, J. F. Jiang, J. W. Xu, S. J. Li, Y. M. Zhou, and Y. N. Xu, "Throughput-optimized FPGA accelerator for deep convolutional neural networks," *ACM Trans. Reconfigur. Technol. Syst. (TRETS)*, vol. 10, no. 3, pp. 17, Jul. 2017.
- [84] K. Korosec, This startup is using Uber and Lyft drivers to bring self-driving cars to market faster. [Online]. Available: <https://www.theverge.com/2017/7/19/16000272/ivl5-self-driving-car-tesla-map-lidar>.
- [85] H. Yang, Y. Z. Shen, M. Hasan, D. Perez, and J. Shull, "Framework for Interactive M3 visualization of microscopic traffic simulation," *Transp. Res. Rec.*, vol. 2672, no. 44, pp. 62–71, Dec. 2018.
- [86] D. Perez, M. Hasan, Y. Z. Shen, and H. Yang, "AR-PED: a framework of augmented reality enabled pedestrian-in-the-loop simulation," *Simul. Model. Pract. Theory*, vol. 94, pp. 237–249, Jul. 2019.
- [87] USC, 3 Ways AR/VR are improving autonomous vehicles. [Online]. Available: <http://ict.usc.edu/news/3-ways-arvr-are-improving-autonomous-vehicles/>.
- [88] G. H. Sim, S. Klos, A. Asadi, A. Klein, and M. Hollick, "An online context-aware machine learning algorithm for 5G mmWave vehicular communications," *IEEE/ACM Trans. Netw.*, vol. 26, no. 6, pp. 2487–2500, Dec. 2018.
- [89] J. Choi, V. Va, N. Gonzalez-Prelcic, R. Daniels, C. R. Bhat, and R. W. Heath, "Millimeter-wave vehicular communication to support massive automotive sensing," *IEEE Commun. Mag.*, vol. 54, no. 12, pp. 160–167, Dec. 2016.
- [90] J. K. Zhang and K. Cho, "Query-efficient imitation learning for end-to-end autonomous driving," *arXiv: 1605.06450*, May 2016.
- [91] Z. L. Chen and X. M. Huang, "Accurate and reliable detection of traffic lights using multiclass learning and multiobject tracking," *IEEE Intell. Transp. Syst. Mag.*, vol. 8, no. 4, pp. 28–42, 2016.
- [92] B. Okumura, M. R. James, Y. Kanzawa, M. Derry, K. Sakai, T. Nishi, and D. Prokhorov, "Challenges in perception and decision making for intelligent automotive vehicles: a case study," *IEEE Trans. Intell. Veh.*, vol. 1, no. 1, pp. 20–32, Mar. 2016.
- [93] Z. Zhong, M. Y. Lei, S. Z. Li, and J. P. Fan, "Re-ranking object proposals for object detection in automatic driving," *arXiv: 1605.05904*, May 2016.
- [94] M. N. Saquib, M. J. Ashraf, and C. D. O. Malik, "Self driving car system using (AI) artificial intelligence," *Asian J. Appl. Sci. Technol.*, vol. 1, no. 6, pp. 85–88, 2017.
- [95] S. Bang and S. Ahn, "Platooning strategy for connected and autonomous vehicles: transition from light traffic," *Trans. Res. Rec. J. Transp. Res. Board*, vol. 2623, no. 1, pp. 73–81, Jan. 2017.
- [96] L. Chen, X. M. Hu, T. Xu, H. L. Kuang, and Q. Q. Li, "Turn signal detection during nighttime by CNN detector and perceptual hashing tracking," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 12, pp. 3303–3314, Dec. 2017.
- [97] N. Morales, J. Toledo, L. Acosta, and J. Sánchez-Medina, "A combined voxel and particle filter-based approach for fast obstacle detection and tracking in automotive applications," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 7, pp. 1824–1834, Jul. 2017.
- [98] P. J. Navarro, C. Fernandez, R. Borraz, and D. Alonso, "A machine learning approach to pedestrian detection for autonomous vehicles using high-definition 3D range data," *Sensors*, vol. 17, no. 1, pp. 18, 2017.
- [99] K. Okamoto, K. Berntorp, and S. Di Cairano, "Driver intention-based vehicle threat assessment using random forests and particle filtering," *IFAC-PapersOnLine*, vol. 50, no. 1, pp. 13860–13865, Jul. 2017.
- [100] S. S. Shadrin, O. O. Varlamov, and A. M. Ivanov, "Experimental autonomous road vehicle with logical artificial intelligence," *J. Adv. Transp.*, vol. 2017, pp. 2492765, 2017.
- [101] A. M. López, G. Villalonga, L. Sellart, G. Ros, Vazquez, J. L. Xu, J. Marin, and A. Mozafari, "Training my car to see using virtual worlds," *Image Vis. Comput.*, vol. 68, pp. 102–118, Dec. 2017.
- [102] S. Natarajan, A. K. Annamraju, and C. S. Baradkar, "Traffic sign recognition using weighted multi-convolutional neural network," *IET Intell. Transp. Syst.*, vol. 12, no. 10, pp. 1396–1405, 2018.
- [103] R. Bin Sulaiman, Artificial intelligence based autonomous car. [Online]. Available: [https://papers.ssrn.com/sol3/papers.cfm?abstract\\_id=3167638](https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3167638).
- [104] Y. Jeong, S. Son, E. Jeong, and B. Lee, "An integrated self-diagnosis system for an autonomous vehicle based on an iot gateway and deep learning," *Appl. Sci.*, vol. 8, no. 7, pp. 1164, 2018.
- [105] M. Amir, F. Vahid, and T. Givargis, "Switching predictive control using reconfigurable state-based model," *ACM Trans. Des. Autom. Electron. Syst.*, vol. 24, no. 1, pp. 2, Nov. 2018.
- [106] Y. Y. Ye, X. L. Hao, and H. J. Chen, "Lane detection method based on lane structural analysis and CNNs," *IET Intell. Transp. Syst.*, vol. 12, no. 6, pp. 513–520, 2018.
- [107] B. M. Elbagoury, R. Maskeliunas, and A. B. M. M. Salem, "A hybrid lidar/radar-based deep learning and vehicle recognition engine for autonomous vehicle Precrash control," *Eastern*, vol. 5, no. 9, pp. 6–17, 2018.
- [108] D. Fényes, B. Németh, and P. Gáspár, "Data-driven reachability analysis for the reconfiguration of vehicle control systems," *IFAC-PapersOnLine*, vol. 51, no. 24, pp. 831–836, 2018.
- [109] J. Dequaire, P. Ondrůška, D. Rao, D. Wang, and I. Posner, "Deep tracking in the wild: end-to-end tracking using recurrent neural networks," *Int. J. Rob. Res.*, vol. 37, no. 4–5, pp. 492–512, 2018.
- [110] W. Farag, "Recognition of traffic signs by convolutional neural nets for self-driving vehicles," *Int. J. Knowl-based Intell. Eng. Syst.*, vol. 22, no. 3, pp. 205–214, 2018.



- [111] X. L. Liu and Z. D. Deng, "Segmentation of drivable road using deep fully convolutional residual network with pyramid pooling," *Cogn. Comput.*, vol. 10, no. 2, pp. 272–281, Apr. 2018.
- [112] A. Dairi, F. Harrou, M. Senouci, and Y. Sun, "Unsupervised obstacle detection in driving environments using deep-learning-based stereovision," *Rob. Auton. Syst.*, vol. 100, pp. 287–301, Feb. 2018.
- [113] S. Yang, W. S. Wang, C. Liu, and W. W. Deng, "Scene understanding in deep learning-based end-to-end controllers for autonomous vehicles," *IEEE Trans. Syst., Man Cybern. Syst.*, vol. 49, no. 1, pp. 53–63, Jan. 2019.
- [114] Q. Meng, H. S. Song, G. Li, Y. A. Zhang, and X. Q. Zhang, "A block object detection method based on feature fusion networks for autonomous vehicles," *Complexity*, vol. 2019, pp. 4042624, 2019.
- [115] C. Lv, X. S. Hu, A. Sangiovanni-Vincentelli, Y. T. Li, C. M. Martinez, and D. P. Cao, "Driving-style-based codesign optimization of an automated electric vehicle: a cyber-physical system approach," *IEEE Trans. Ind. Electron.*, vol. 66, no. 4, pp. 2965–2975, Apr. 2019.
- [116] B. K. Chen, C. Gong, and J. Yang, "Importance-aware semantic segmentation for autonomous vehicles," *IEEE Trans. Intell. Transp. Syst.*, vol. 20, no. 1, pp. 137–148, Jan. 2019.
- [117] L. Chen, X. M. Hu, W. Tian, H. Wang, D. P. Cao, and F. Y. Wang, "Parallel planning: a new motion planning framework for autonomous driving," *IEEE/CAA J. Autom. Sinica*, vol. 6, no. 1, pp. 236–246, Jan. 2019.



**Yifang Ma** received the B.E. degree in transportation engineering from Beijing Jiaotong University in 2004, and the master degree in 2007 in transportation planning and management from Tongji University. In 2015, she received the M.S. degree in urban informatics from New York University (NYU), USA. She is currently pursuing the Ph.D. degree in the Department of Information Technology and Decision Science in Strome College of Business at Old Dominion University, USA. Her research interests include information technology, supply chain management, business analytics, data science, urban informatics, and emerging technologies in transportation.



**Zhenyu Wang** received the B.S. degree in English literature in 2011 and M.S. in communication and information system in 2014 from Beijing University of Posts and Telecommunications. He is a currently Ph.D. candidate in the Department of Computational Modeling and Simulation Engineering at Old Dominion University, USA. His research interests include traffic safety issues, artificial intelligence, transportation modeling and simulation, and data mining.



**Hong Yang** received the B.E. degree in transportation engineering from Southwest Jiaotong University in 2004, and the master degree in transportation planning and management from Tongji University in 2007. He also received the M.S. degree in applied and mathematical statistics and Ph.D. degree in civil engineering from Rutgers, The State University of New Jersey, USA, in 2010 and 2012, respectively. He was a Post-Doctoral Associate in the Department of Civil and Urban Engineering (CUE) and Center for Urban Science and Progress (CUSP) at New York University (NYU). He is currently an Assistant Professor in the Department of Computational Modeling and Simulation Engineering at Old Dominion University, USA. His research interests include smart mobility, transportation safety, urban informatics, data science, statistics, modeling and simulation, spatial data analytics, machine learning, traffic operations, transportation resilience, and emerging technologies in transportation.



**Lin Yang (M'20)** is an Assistant Professor in the Department of Mechanical and Electric Engineering, School of Engineering, at Huazhong Agricultural University. He is also affiliated with the Laboratory of Connected and Intelligent Agriculture. He received the B.S. degree in computer science and technology from the Naval University of Engineering, and Ph.D. degree in mechanical engineering from the Wuhan University of Technology. From 2014 to 2016, he was a Visiting Scholar with the New York University, USA. His research interests include people-centric internet of things, social device-to-device networks, and mobile sensing.